

Data sheet:


Lever lid cans / pails



General information:

- Special sizes on request.
- Welding strip WIMA welded, inside powder covered, outside varnish covered.
- Inside varnishing according to filling goods.
- Solvent proof lining compound in the bottom ends and rings.
- Ears welded and inside welding points covered by 2-components-varnish.
- All sizes are passing a leaking control system, piece by piece, 100 % control after production.

Special sizes and versions on request.

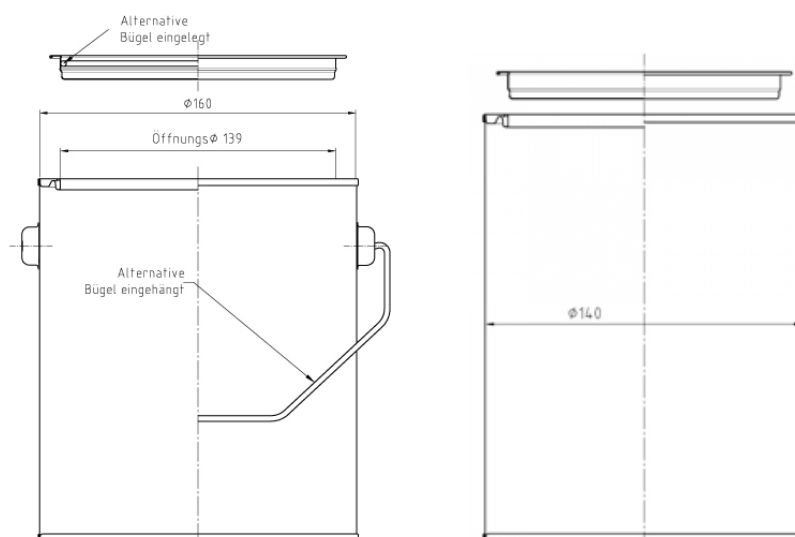

Diameter	Height	Remarks
140 mm	90 – 300 mm	Cylindrical, ears and handle wire on request, handle wire engaged into ears, or packed inside the lid, acryl-type-ring, cutting edge outside.
160 mm	104 – 300 mm	Cylindrical, ears and handle wire on request, handle wire engaged into ears, or packed inside the lid, acryl-type-ring, cutting edge outside.
160/153 mm	104 – 300 mm	Cylindrical, stackable, bottom necking, handle wire engaged into ears, or packed inside the lid, acryl-type-ring, cutting edge outside.
195/190 mm	190 – 300 mm	Cylindrical, stackable, bottom necking, handle wire engaged into ears, or packed inside the lid, acryl-type-ring, cutting edge outside.